

# EGARA 1 1+1

Power Line SPDs

DIN RAIL - IEC TYPE 1+2



## General Data

Internal configuration	1+1
No. Poles	2-Pole
No. DIN rail modules	2
Network configuration	TT, TNS
IEC SPD Type	Class I+II
EN SPD Type	Type 1+2
UL SPD Type	Type 1 Component Assembly
Format	Pluggable
Protection Modes	L-N / N-PE
Product standards	IEC/EN 61643-11; UL 1449 5th Edition



## PART NUMBERS

XXX	275	320
EGA 1 XXX/1+1	33738200	33738208
EGA 1 XXX/1+1 IR (with Remote Indication)	33738201	33738209

## SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

EGA 1 XXX/1+1, EGA 1 XXX/1+1 IR (with Remote Indication)	275	320
Maximum continuous operating voltage (AC) - Uc (L-N) [V]	275	320
Maximum continuous operating voltage (AC) - Uc (N-PE) [V]		255
Nominal voltage AC 50-60 Hz - Un [V]	230	277
Nominal discharge current (8/20) - In (L-N) [kA]		20
Nominal discharge current (8/20) - In (N-PE) [kA]		50
Max Discharge Current (8/20) - I <sub>max</sub> (L-N) [kA]		50
Max Discharge Current (8/20) - I <sub>max</sub> (N-PE) [kA]		100
Lightning impulse current (10/350) - I <sub>imp</sub> (L-N) [kA]		12.5
Lightning impulse current (10/350) - I <sub>imp</sub> (N-PE) [kA]		50
Voltage protection level at In - Up (L-N) [kV]		≤1,5
Voltage protection level at In - Up (L-PE) [kV]		≤1,8
Voltage protection level at In - Up (N-PE) [kV]		≤1,5
Maximum back-up fuse [A [gG]]		315
Short circuit withstand- I <sub>sc</sub> [kA]		25
Following current - I <sub>fi</sub> [A]		100
Residual current- I <sub>pe</sub> [μA]		<10
Response time - t <sub>A</sub> (L-N) [ns]		≤25
Response time - t <sub>A</sub> (N-PE) [ns]		≤100
Specific energy by pole (10/350 μs) - W/R (L-N) [kJ/ohm]		39
Specific energy by pole (10/350 μs) - W/R (N-PE) [kJ/ohm]		625
TOV 5s (LV systems, withstand)- Ut(L-N) [V]	337	403
TOV 120min (LV systems, fail safe)- Ut(L-N) [V]	442.5	528
TOV 200 ms (HV Systems, withstand) - Ut (N-PE) [V]		1200
Dynamic thermal disconnection		Yes
Thermal protection behaviour		OCM (Open Circuit Mode)
No. of ports		1

## DATASHEET

This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 · 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved

**cirprotec**

# EGARA 1 1+1

Power Line SPDs

DIN RAIL - IEC TYPE 1+2

## ADDITIONAL TESTING - TECHNICAL FEATURES

EGA 1 <b>XXX</b> /1+1, EGA 1 <b>XXX</b> /1+1 IR (with Remote Indication)	275	320
Max Discharge Current (8/20) - I <sub>max</sub> (L-N)	65 kA	


## SURGE PROTECTION DEVICE (SPD) - UL TECHNICAL FEATURES

EGA 1 <b>XXX</b> /1+1, EGA 1 <b>XXX</b> /1+1 IR (with Remote Indication)	275	320
Nominal discharge current (8/20) - I <sub>n</sub> [kA]	20	
Maximum continuous operating voltage - MCOV (L-N) [V]	275	320
Maximum continuous operating voltage - MCOV (L-G) [V]	275	320
Maximum continuous operating voltage - MCOV (N-G) [V]	305	
Voltage protection rating - VPR (L-N) [V]	1200	
Voltage protection rating - VPR (L-G) [V]	1500	
Voltage protection rating - VPR (N-G) [V]	1000	
Short-Circuit Current Rating-SCCR [kA]	42	

## MECHANICAL AND ENVIRONMENTAL FEATURES


EGA 1 <b>XXX</b> /1+1, EGA 1 <b>XXX</b> /1+1 IR (with Remote Indication)	275	320
Temperature range [°C]	-40 ... 85	
Humidity range [%]	5 ... 95	
Max. Altitude [m]	4000	
Indication System Type	Green (OK) / Not green (replace)	
Insulating material	PA6 CT1 & PA66 CT1	
Housing color	Grey RAL 7035	
Enclosure - IP	IP20	
Flammability class	UL94 V-0	
Solid conductor cross section	1,5...35mm <sup>2</sup>	
Stranded conductor cross section	1,5...25mm <sup>2</sup>	
Torque rating [N m]	3	
Remote indication conductor cross section [mm <sup>2</sup> ]	0.5 ... 1.5	
Remote indication switching capacity [V/A]	AC: 250/0.5 DC: 30/1	

## DIMENSIONS AND WEIGHT

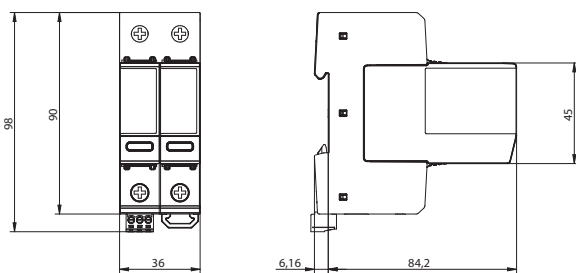

EGA 1 <b>XXX</b> /1+1 EGA 1 <b>XXX</b> /1+1 IR (with Remote Indication)	275	320
Net Weight [kg]	0.27	
Gross weight [kg]	0.29	
Packaging dimensions (H x W x L) [mm]	97 × 38 × 118	

## INTERNAL CONFIGURATION



## REPLACEMENT CARTRIDGES

EGA 1 <b>XXX</b> /1+1 EGA 1 <b>XXX</b> /1+1 IR (with Remote Indication)	275	320
EGARA 1 <b>XXX</b> (Line)	33738001	33738003
EGARA1N(Neutral)	33738000	

## DATASHEET

This document is subject to change at any time without notice [www.cirprotec.com](http://www.cirprotec.com) | Lepanto 49 - 08223 Terrassa, Barcelona Spain © 2024 Cirprotec SLU | All rights reserved

**cirprotec**